


COUNTERFLASHING SET IN BED OF SEALANT WITH FASTENER (BY OTHERS)

CONT. ALUM. HALF PLATE (J6C109-F) 6" (152mm) SPLICE PLATE (J6C109-FSP)

#12 x 1 1/2" [M5x38] STAINLESS PAN HEAD SCREW THRU NEOPRENE WEATHER WASHER (7 PER FRAME @ 18" [457mm] O.C.) (JKSS28)

REINF. EPDM VAPOR BARRIER (JL006-RVB) NOTE: SET IN CONT. BED OF BUTYL SEALANT (BY OTHERS) TERMINATE RVB AT OUTSIDE EDGES OF SYSTEM

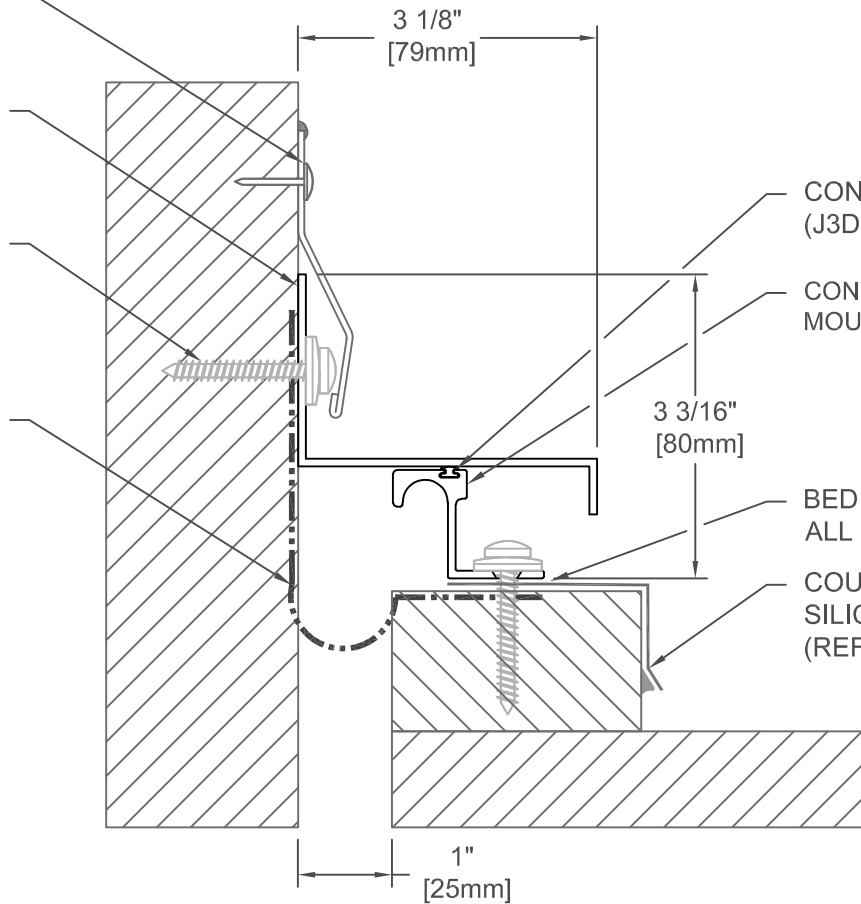

CONT. VINYL GASKET (J3D505-M)

CONT. ALUM. SURFACE MOUNT FRAME (J6A101)

3 3/16" [80mm]

BED OF BUTYL SEALANT BETWEEN ALL LAYERS (BY OTHERS)

COUNTERFLASHING AND SILICONE SEALANT (BY OTHERS) (REF. STANDARD CURB DETAIL)

### 651-A02-025

JOINT WIDTH		MOVEMENT			
		MINIMUM		MAXIMUM	
US	mm	US	mm	US	mm
1"	25	1/2"	13	2"	51

FINISH: MILL
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION:  
ROOF/CORNER, SURFACE MOUNT  
EXTERIOR CONDITION

DATE:	6-20-17
SCALE:	1:2
DOC:	CADJM.189/R8




For More Information Visit: [Inprocorp.com](http://Inprocorp.com)

COUNTERFLASHING SET IN BED OF SEALANT WITH FASTENER (BY OTHERS)

CONT. ALUM. HALF PLATE (J6C110-F) 6" (152mm) SPLICE PLATE (J6C110-FSP)

#12 x 1 1/2" [M5x38] STAINLESS PAN HEAD SCREW THRU NEOPRENE WEATHER WASHER (7 PER FRAME @ 18" [457mm] O.C.) (JKSS28)

REINF. EPDM VAPOR BARRIER (JL009-RVB) NOTE: SET IN CONT. BED OF BUTYL SEALANT (BY OTHERS) TERMINATE RVB AT OUTSIDE EDGES OF SYSTEM

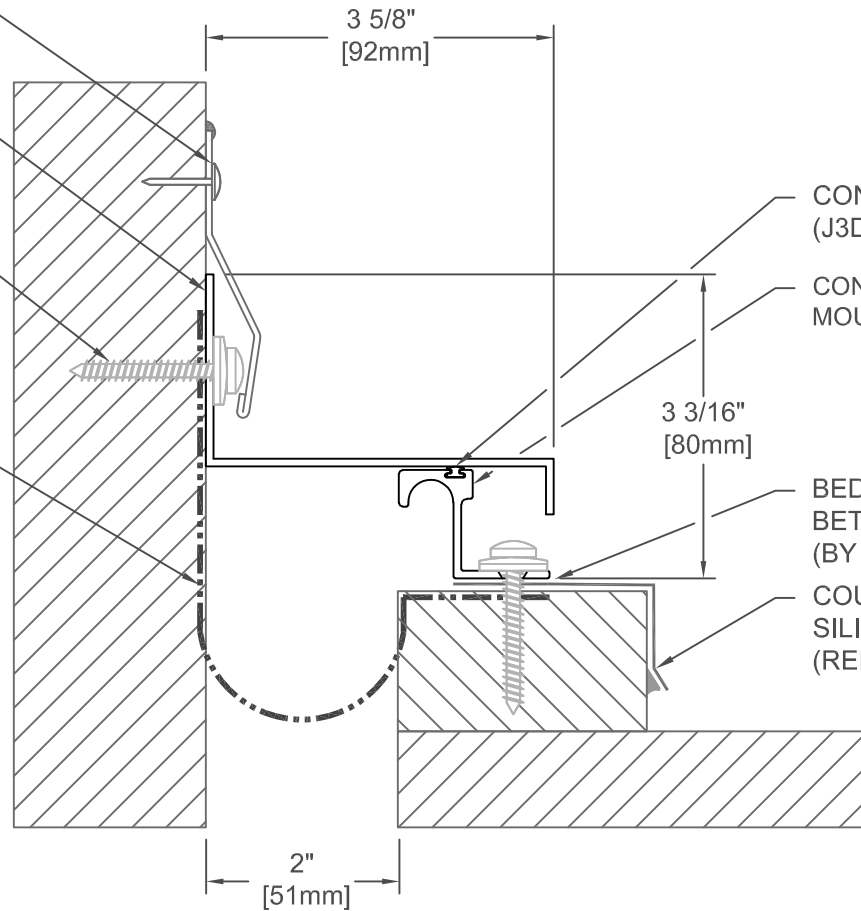

CONT. VINYL GASKET (J3D505-M)

CONT. ALUM. SURFACE MOUNT FRAME (J6A101)

BED OF BUTYL SEALANT BETWEEN ALL LAYERS (BY OTHERS)

COUNTERFLASHING AND SILICONE SEALANT (BY OTHERS) (REF. STANDARD CURB DETAIL)


### 651-A02-050

JOINT WIDTH		MOVEMENT			
		MINIMUM		MAXIMUM	
US	mm	US	mm	US	mm
2"	51	1/2"	13	3"	76

FINISH: MILL
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION:  
ROOF/CORNER, SURFACE MOUNT  
EXTERIOR CONDITION

DATE:	6-20-17
SCALE:	1:2
DOC:	CADJM.189/R8

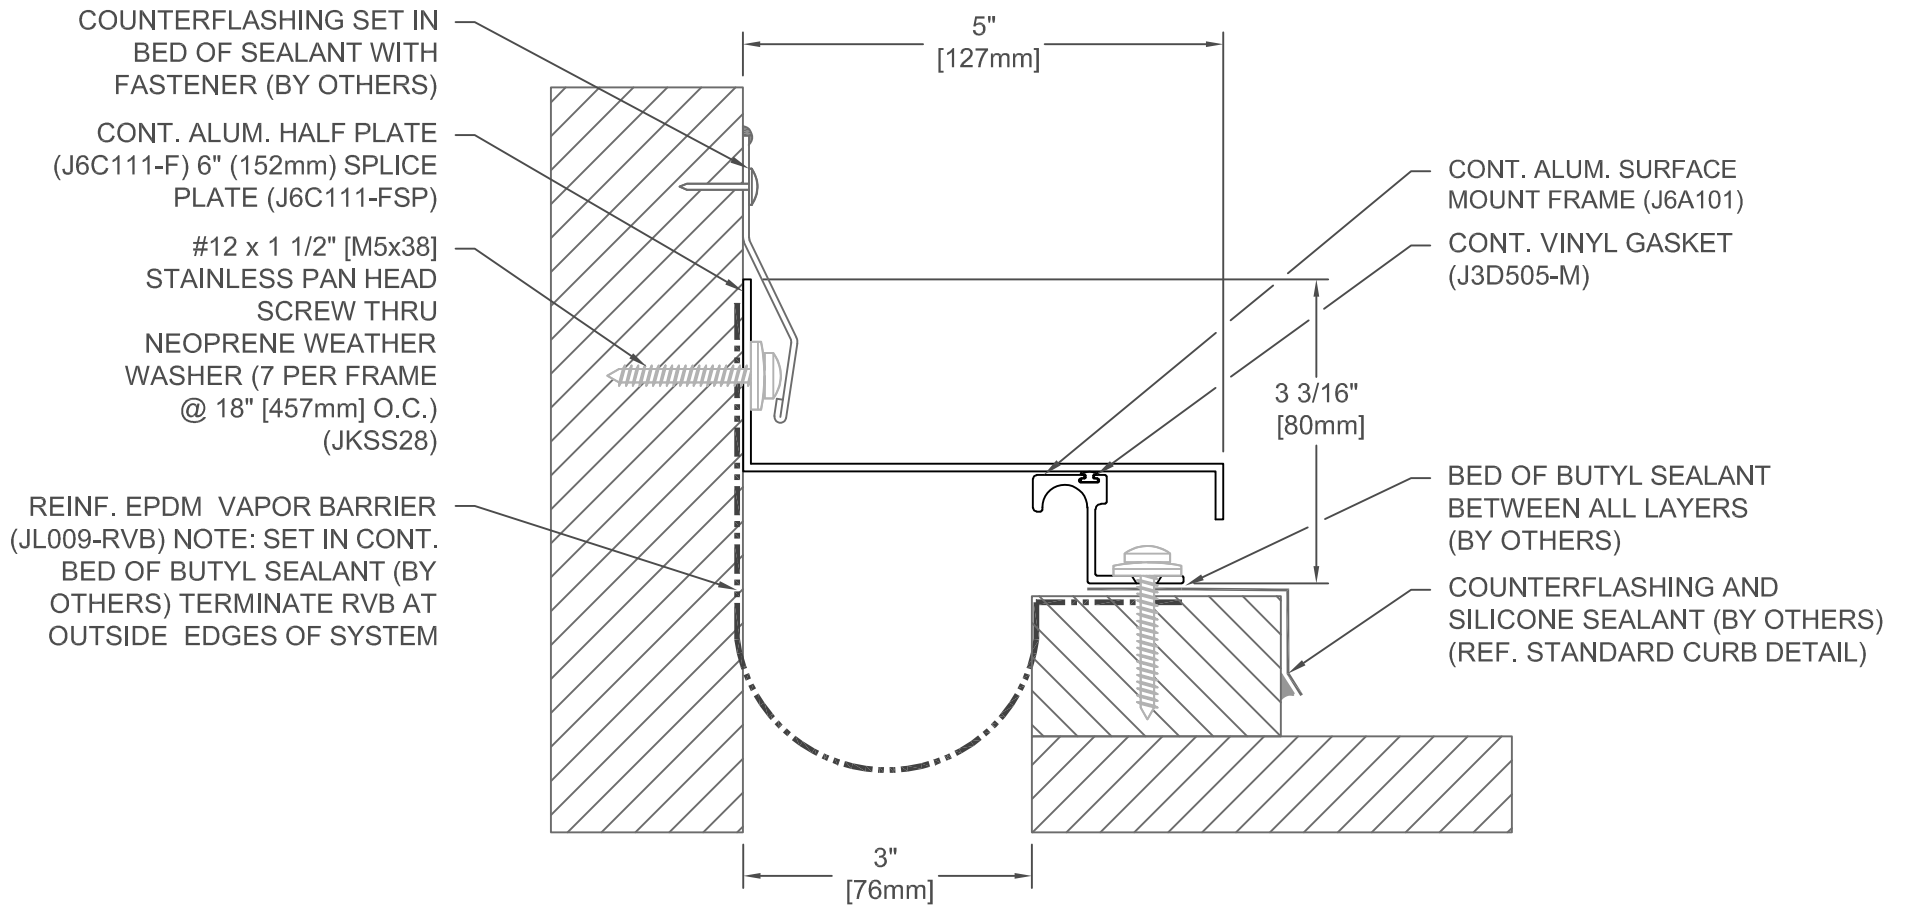

### 651-A02-075

JOINT WIDTH		MOVEMENT			
		MINIMUM		MAXIMUM	
US	mm	US	mm	US	mm
3"	76	1/2"	13	4-1/2"	114


FINISH: MILL
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION:  
ROOF/CORNER, SURFACE MOUNT  
EXTERIOR CONDITION

DATE:	6-20-17
SCALE:	1:2
DOC:	CADJM.189/R8

**inpro**<sup>®</sup>

For More Information Visit: [Inprocorp.com](http://Inprocorp.com)

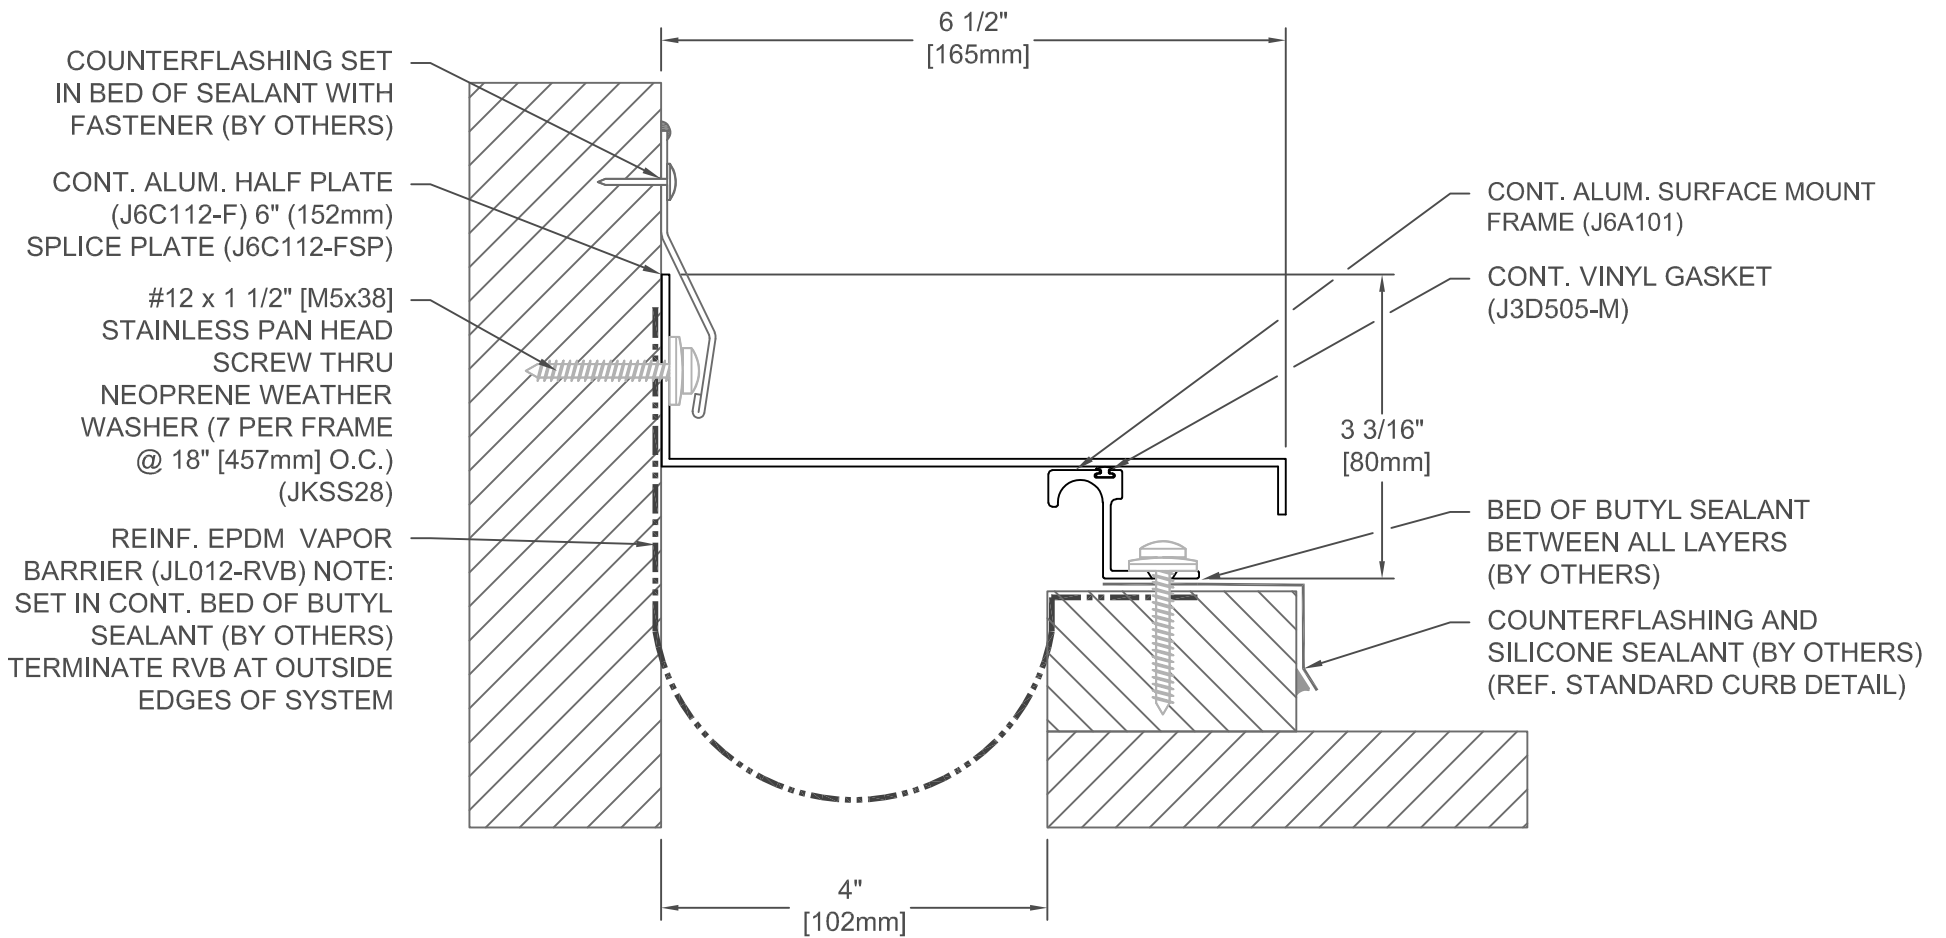

## 651-A02-100

JOINT WIDTH		MOVEMENT			
		MINIMUM		MAXIMUM	
US	mm	US	mm	US	mm
4"	102	1/2"	13	6"	152


FINISH: MILL
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION:  
ROOF/CORNER, SURFACE MOUNT  
EXTERIOR CONDITION

DATE:	6-20-17
SCALE:	1:2
DOC:	CADJM.189/R8

**inpro**<sup>®</sup>

For More Information Visit: [Inprocorp.com](http://Inprocorp.com)

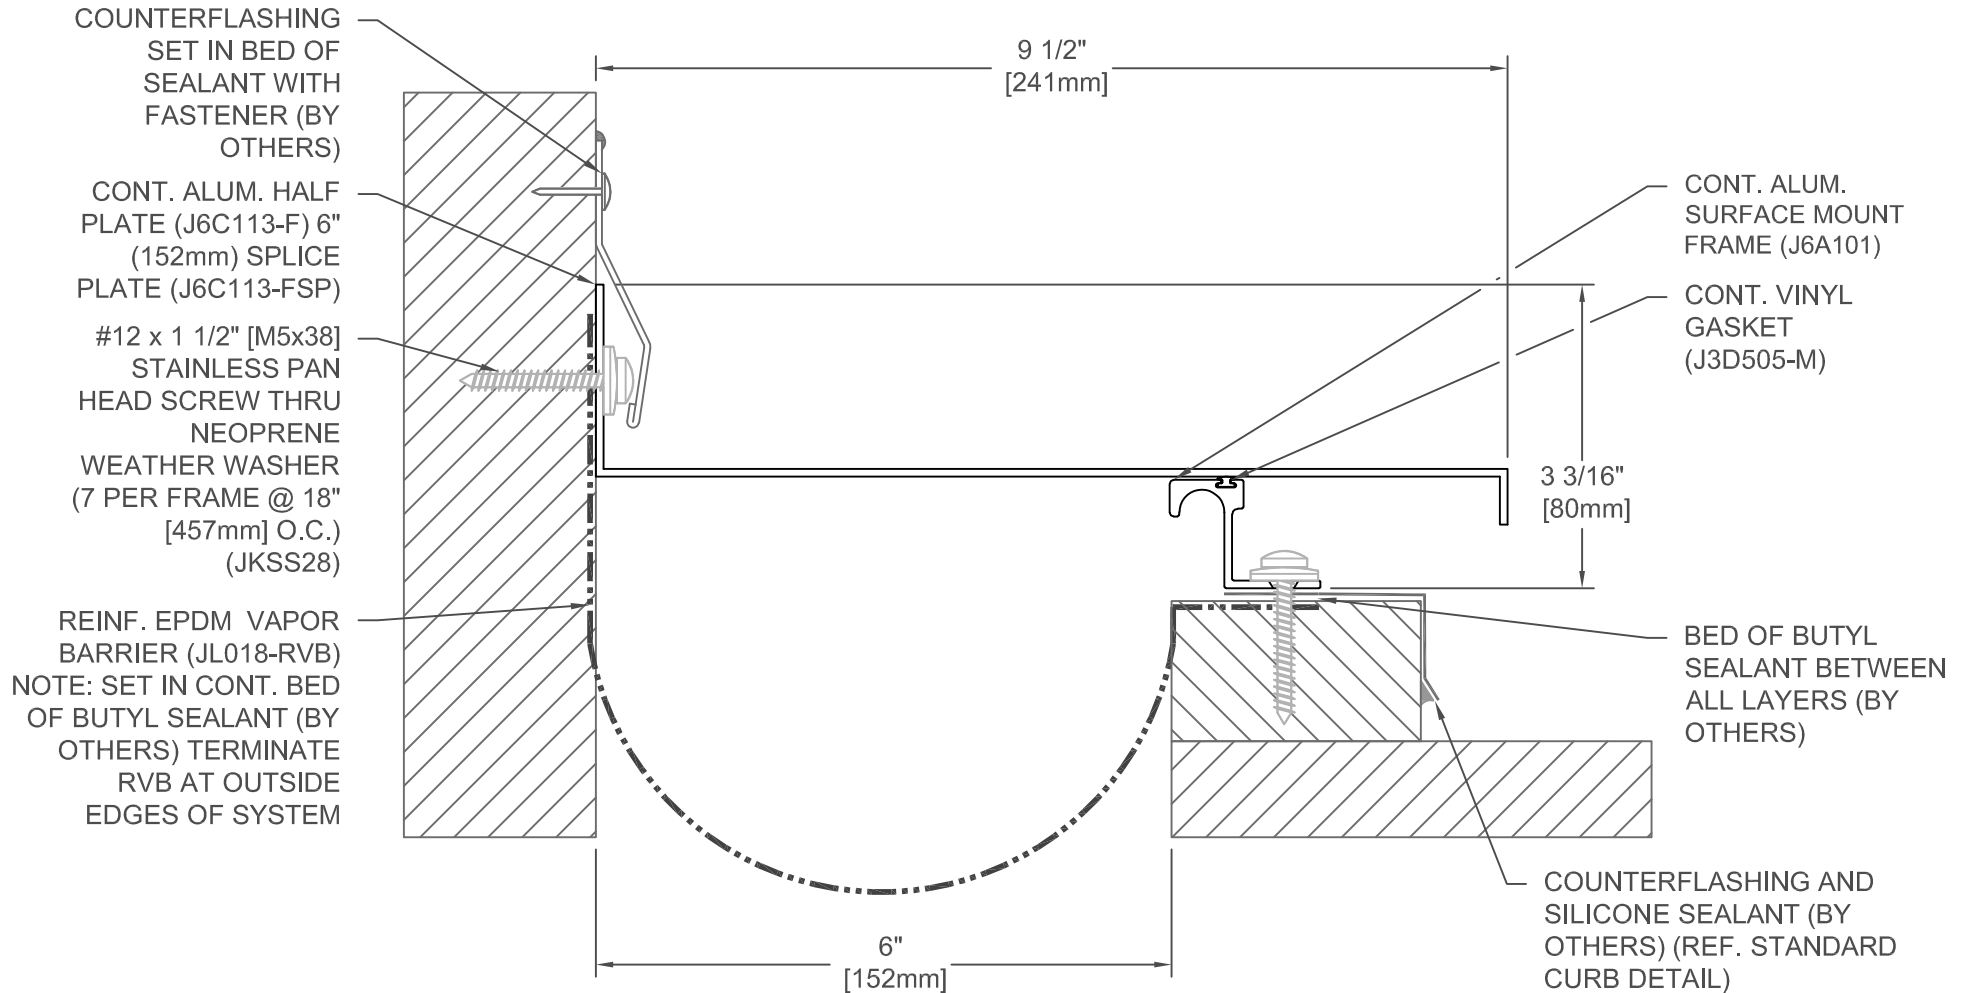

### 651-A02-150

JOINT WIDTH		MOVEMENT			
		MINIMUM		MAXIMUM	
US	mm	US	mm	US	mm
6"	152	1/2"	13	9"	229


FINISH: MILL
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION:  
ROOF/CORNER, SURFACE MOUNT  
EXTERIOR CONDITION

DATE:	6-20-17
SCALE:	1:2
DOC:	CADJM.189/R8



For More Information Visit: [Inprocorp.com](http://Inprocorp.com)

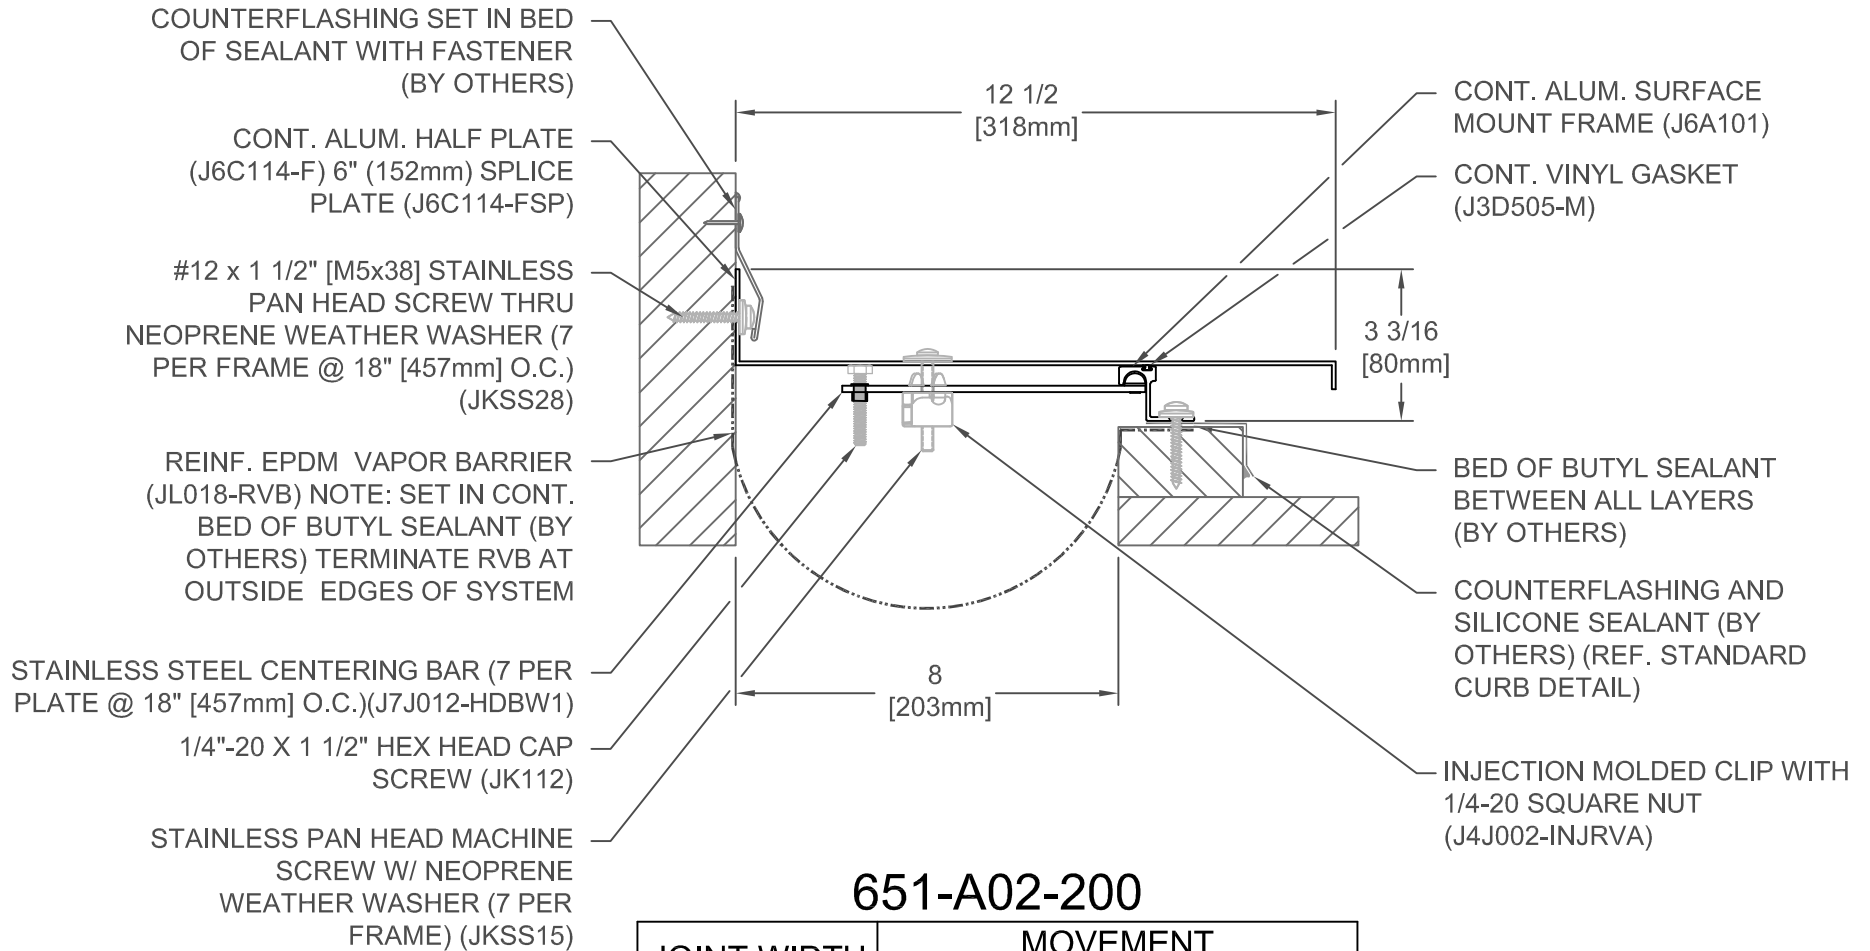

## 651-A02-200

JOINT WIDTH		MOVEMENT			
		MINIMUM		MAXIMUM	
US	mm	US	mm	US	mm
8"	203	4"	102	12"	305


FINISH: MILL
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION:  
ROOF/CORNER, SURFACE MOUNT  
EXTERIOR CONDITION

DATE:	6-20-17
SCALE:	1:2
DOC:	CADJM.189/R8

**inpro**<sup>®</sup>

For More Information Visit: [Inprocorp.com](http://Inprocorp.com)

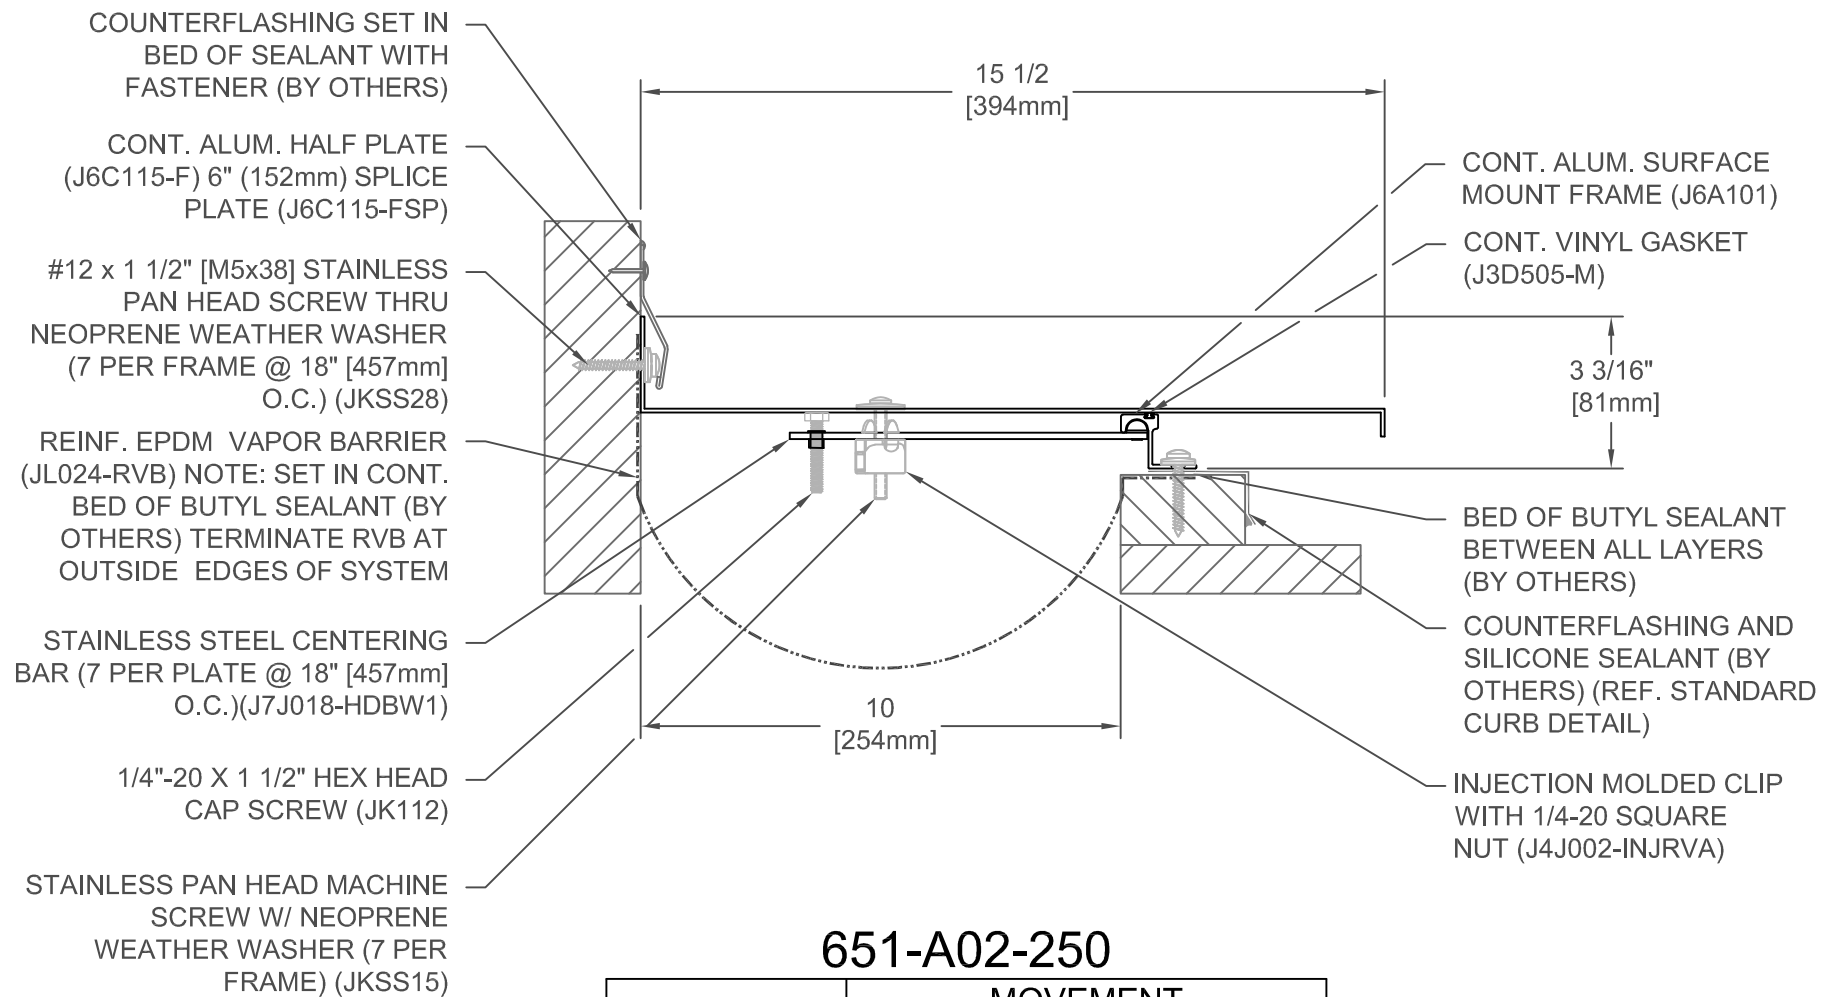

JOINT WIDTH		MOVEMENT			
		MINIMUM		MAXIMUM	
US	mm	US	mm	US	mm
10"	254	5"	127	15"	381


FINISH: MILL
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION:  
ROOF/CORNER, SURFACE MOUNT  
EXTERIOR CONDITION

DATE:	6-20-17
SCALE:	1:4
DOC:	CADJM.189/R8

**inpro**<sup>®</sup>

For More Information Visit: [Inprocorp.com](http://Inprocorp.com)

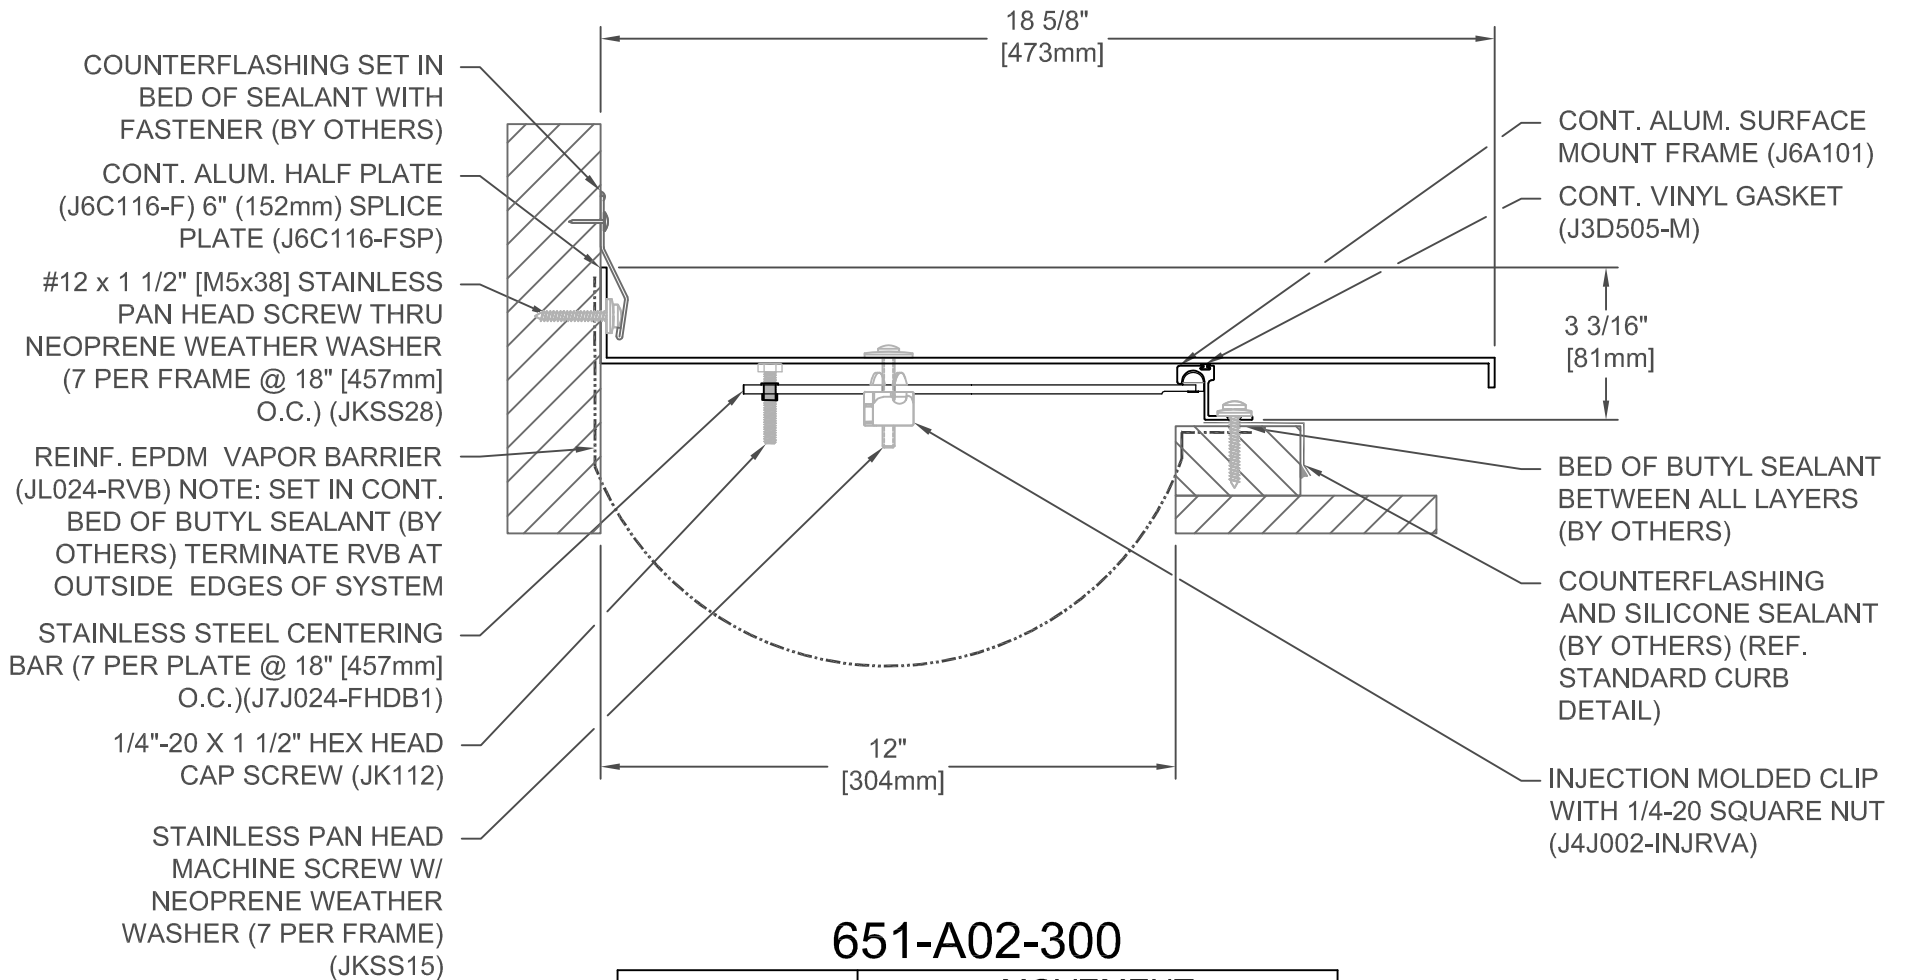

JOINT WIDTH		MOVEMENT			
		MINIMUM		MAXIMUM	
US	mm	US	mm	US	mm
12"	305	6"	152	18"	457


FINISH: MILL
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION:  
ROOF/CORNER, SURFACE MOUNT  
EXTERIOR CONDITION

DATE:	6-20-17
SCALE:	1:4
DOC:	CADJM.189/R8

**inpro.**  
For More Information Visit: [Inprocorp.com](http://Inprocorp.com)




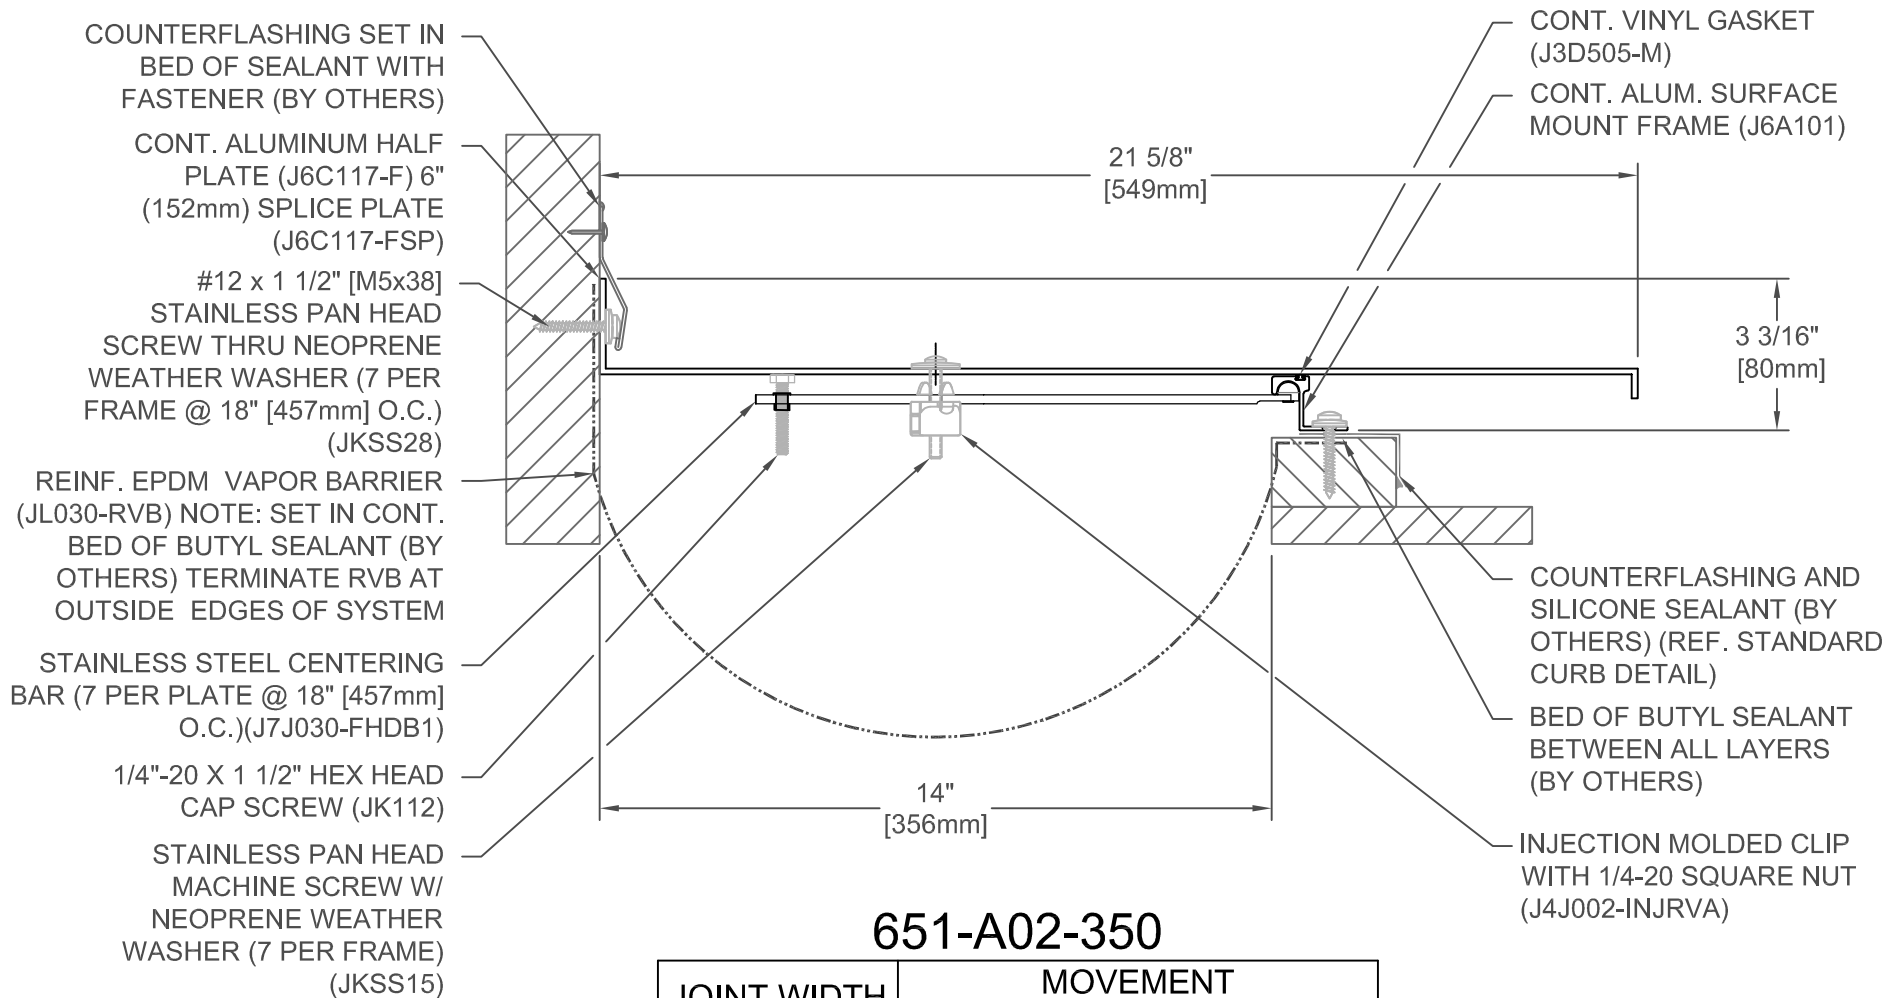

FINISH: MILL
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION:  
ROOF/CORNER, SURFACE MOUNT  
EXTERIOR CONDITION

DATE:	6-20-17
SCALE:	1:4
DOC:	CADJM.189/R8

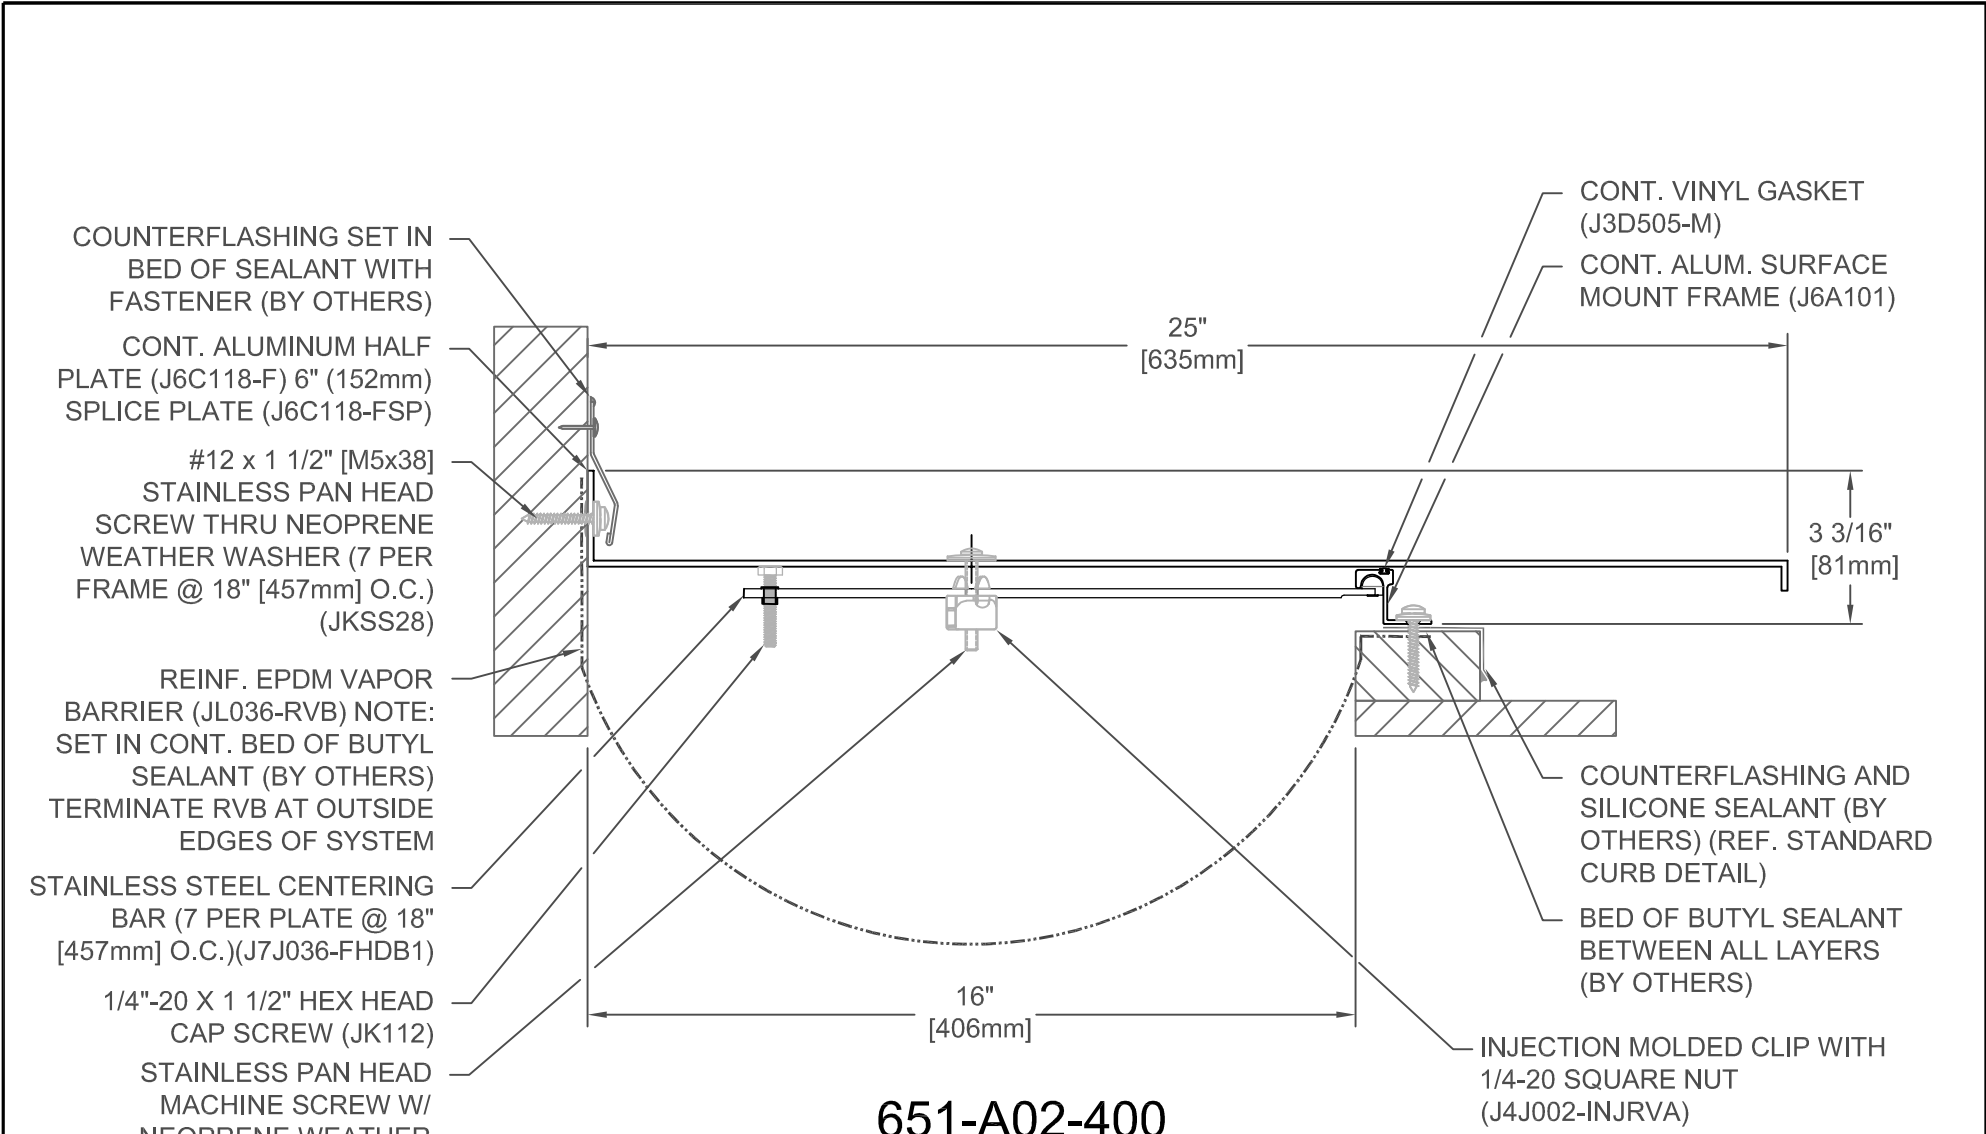

### 651-A02-400

JOINT WIDTH		MOVEMENT			
		MINIMUM		MAXIMUM	
US	mm	US	mm	US	mm
16"	406	8"	203	24"	610

FINISH: MILL  
 PROJECT:  
 CUSTOMER:  
 LOCATION:

APPLICATION:  
 ROOF/CORNER, SURFACE MOUNT  
 EXTERIOR CONDITION

DATE: 6-20-17  
 SCALE: 1:4  
 DOC: CADJM.189/R8

