

Movement Rating ± 50%



- Seismic capable system designed to meet the needs of Open Structures and Vehicular loading.
- Industry unique profile drastically reduces the lateral impact (shear forces) encountered with repeated vehicular traffic. This maximizes product lifespan & ensures against the premature fatigue encountered in other configurations on the market.
- Tapered plate and frames provide a seamless, ADA compliant design that constantly levels itself and maintains a flush condition.
- Heavy duty design uses a thick high strength centering bar and spring assembly, to resist vibrations.
- 1" [25mm] frame depth ensures no interference in rebar / cabling structure.

- Serrated cover plate for added slip resistance.
- Integral high durometer seal deters water from entering the system and acts as a noise dampening device.
- Reinforced Vapor Barrier is included.
- System designed for areas of low speed traffic (5-10 mph)

Application	System	w		Н		S		В		Movement +/-			
		Joint Width		Frame Height		Sightline		Blockout		Horizontal		Vertical	
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm
Floor to Floor	787-A01-100	4"	100	1"	25	13 <sup>1</sup> /2"	342	6"	152	2"	51	1"	25
	787-A01-150	6"	150	1"	25	16 <sup>1</sup> /2"	419	6 1/2"	165	3"	76	1 1/2"	38
	787-A01-200	8"	200	1"	25	18 <sup>1</sup> /2"	470	6 1/2"	165	4"	102	2"	51
	787-A01-250	10″	250	1″	25	24 1/2"	622	8 1/2″	216	5″	127	2 1/2″	64
	787-A01-300	12″	300	1″	25	26 1/2"	673	8 1/2″	216	6″	152	3″	76
Floor to Wall	787-A02-100	4″	100	1″	25	8 3/4″	222	6″	152	1″	25	1″	25
	787-A02-150	6″	150	1″	25	11 1/4″	286	6 1/2″	165	1 1/2″	76	1 1/2″	38
	787-A02-200	8″	200	1″	25	13 1/4″	337	6 1/2″	165	2″	102	2″	51
	787-A02-250	10″	250	1″	25	17 1/4″	438	8 1/2″	216	2 1/2″	127	2 1/2″	64
	787-A02-300	12″	300	1″	25	19 1/4″	489	8 1/2″	216	3″	152	3″	76


\*Contact your InPro Representative for project specific loading capabilities.

IPC.1564/REV.9




## 787 Series

Heavy Duty Seismic Floor Systems

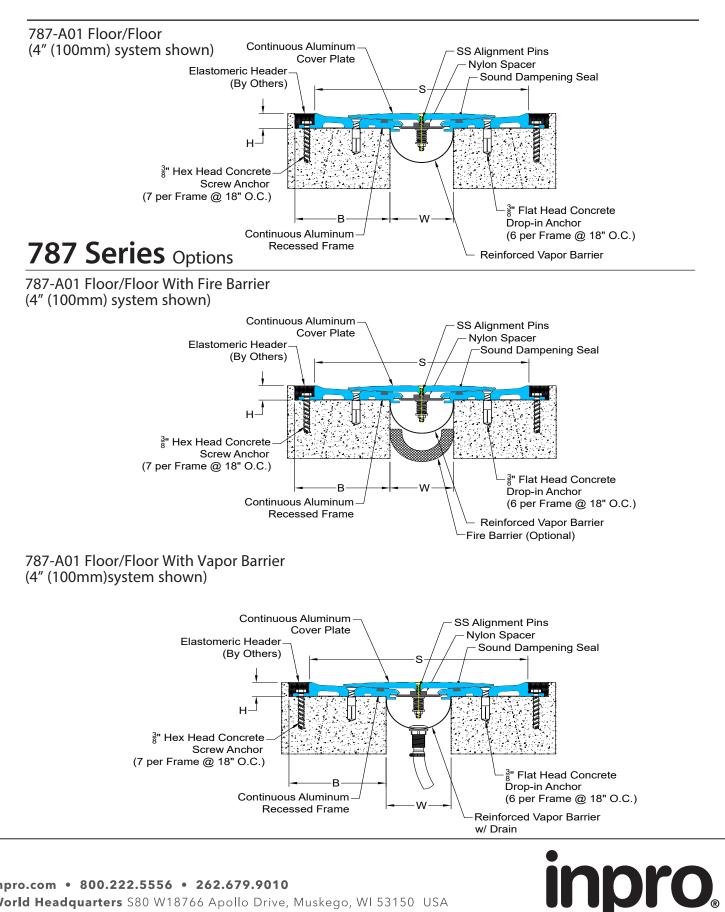

## 787 Series

Heavy Duty Seismic Floor Systems

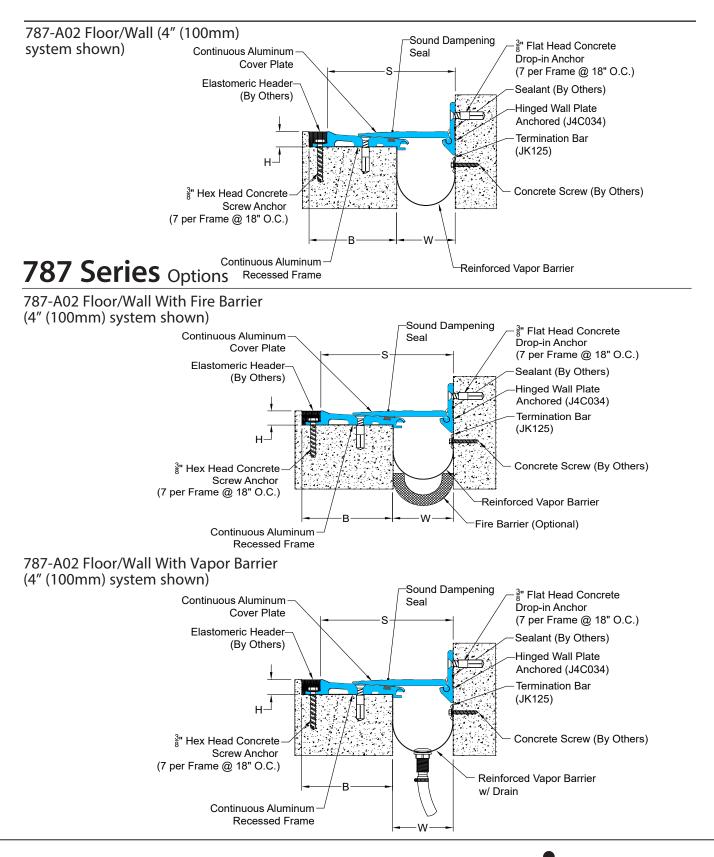

**INPro**