

NOTE:
 SURROUNDING SUBSTRATE MUST
 MATCH OR EXCEED PERFORMANCE
 CAPABILITIES OF THE 990 FIRE
 RATED FOAM TO ACHIEVE FIRE
 RATING

990 FOAM LENGTH - 6' 6" [1981mm]
 PLATE LENGTH - 10' [3048mm]

SYSTEM	JOINT WIDTH		SEAL HEIGHT		MOVEMENT ±			
	US	mm	US	mm	COMPRESSION		EXPANSION	
	US	mm	US	mm	US	mm	US	mm
990V2-050 UC	1/2"	13	4"	102	1/8"	3	1/8"	3
990V2-100 UC	1"	25	4"	102	1/4"	6	1/4"	6
990V2-150 UC	1 1/2"	38	4"	102	3/8"	10	3/8"	10
990V2-200 UC	2"	51	4"	102	1/2"	13	1/2"	13
990V2-250 UC	2 1/2"	64	4"	102	5/8"	16	5/8"	16
990V2-300 UC	3"	76	4"	102	3/4"	19	3/4"	19
990V2-350 UC	3 1/2"	89	4"	102	7/8"	22	7/8"	22
990V2-400 UC	4"	102	4"	102	1"	25	1"	25
990V2-450 UC	4 1/2"	119	4"	102	1 1/8"	29	1 1/8"	29


FINISH: N/A
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION-
 WALL/WALL AND WALL/CORNER
 2 HOUR FIRE RATED

DATE:	2-25-16
SCALE:	1:2
DOC:	CADJM.175/R3



For More Information Visit: Inprocorp.com

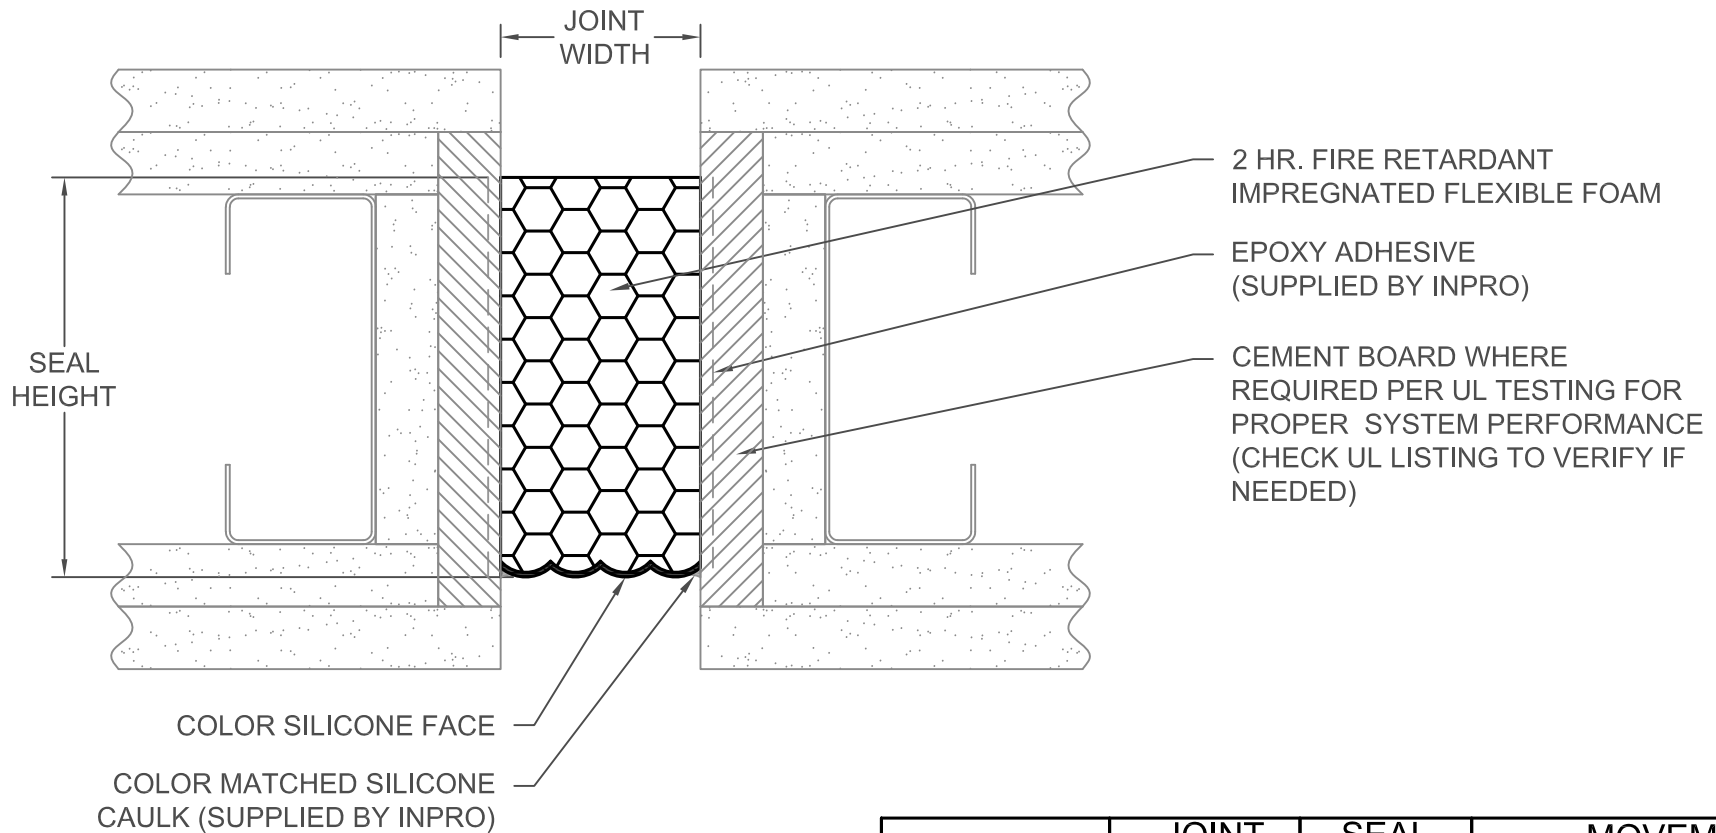

NOTE:
 SURROUNDING SUBSTRATE MUST
 MATCH OR EXCEED PERFORMANCE
 CAPABILITIES OF THE 990 FIRE
 RATED FOAM TO ACHIEVE FIRE
 RATING

990 FOAM LENGTH - 6' 6" [1981mm]
 PLATE LENGTH - 10' [3048mm]

SYSTEM	JOINT WIDTH		SEAL HEIGHT		MOVEMENT ±			
	US	mm	US	mm	COMPRESSION		EXPANSION	
					US	mm	US	mm
990V2-050	1/2"	13	4"	102	1/8"	3	1/8"	3
990V2-100	1"	25	4"	102	1/4"	6	1/4"	6
990V2-150	1 1/2"	38	4"	102	3/8"	10	3/8"	10
990V2-200	2"	51	4"	102	1/2"	13	1/2"	13
990V2-250	2 1/2"	64	4"	102	5/8"	16	5/8"	16
990V2-300	3"	76	4"	102	3/4"	19	3/4"	19
990V2-350	3 1/2"	89	4"	102	7/8"	22	7/8"	22
990V2-400	4"	102	4"	102	1"	25	1"	25
990V2-450	4 1/2"	119	4"	102	1 1/8"	29	1 1/8"	29


FINISH: N/A
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION-
 WALL/WALL AND WALL/CORNER
 2 HOUR FIRE RATED

DATE:	2-25-16
SCALE:	1:2
DOC:	CADJM.175/R3



For More Information Visit: Inprocorp.com

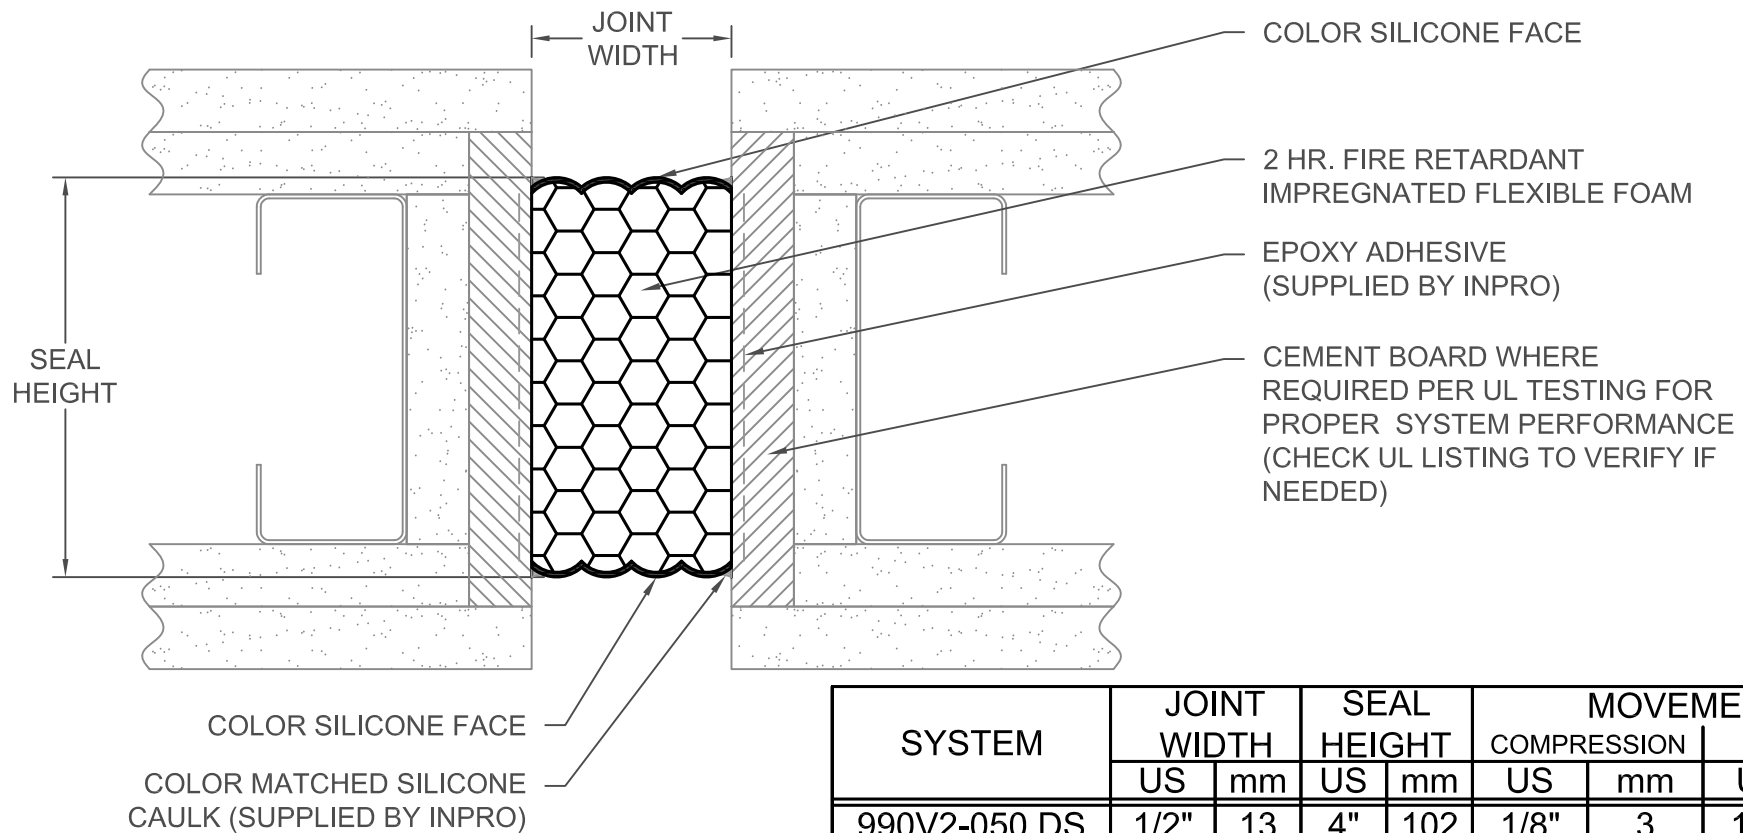

NOTE:
 SURROUNDING SUBSTRATE MUST MATCH OR EXCEED PERFORMANCE CAPABILITIES OF THE 990 FIRE RATED FOAM TO ACHIEVE FIRE RATING

990 FOAM LENGTH - 6' 6" [1981mm]
 PLATE LENGTH - 10' [3048mm]

SYSTEM	JOINT WIDTH		SEAL HEIGHT		MOVEMENT ±			
	US	mm	US	mm	COMPRESSION		EXPANSION	
	US	mm	US	mm	US	mm	US	mm
990V2-050 DS	1/2"	13	4"	102	1/8"	3	1/8"	3
990V2-100 DS	1"	25	4"	102	1/4"	6	1/4"	6
990V2-150 DS	1 1/2"	38	4"	102	3/8"	10	3/8"	10
990V2-200 DS	2"	51	4"	102	1/2"	13	1/2"	13
990V2-250 DS	2 1/2"	64	4"	102	5/8"	16	5/8"	16
990V2-300 DS	3"	76	4"	102	3/4"	19	3/4"	19
990V2-350 DS	3 1/2"	89	4"	102	7/8"	22	7/8"	22
990V2-400 DS	4"	102	4"	102	1"	25	1"	25
990V2-450 DS	4 1/2"	114	4"	102	1 1/8"	29	1 1/8"	29
990V2-500 DS	5"	127	4"	102	1 1/4"	32	1 1/4"	32
990V2-550 DS	5 1/2"	140	4"	102	1 3/8"	35	1 3/8"	35
990V2-600 DS	6"	153	4"	102	1 1/2"	38	1 1/2"	38

FINISH: N/A
PROJECT:
CUSTOMER:
LOCATION:

APPLICATION-
 WALL/WALL AND WALL/CORNER
 2 HOUR FIRE RATED

DATE:	2-25-16
SCALE:	1:2
DOC:	CADJM.175/R3



For More Information Visit: Inprocorp.com