


Board Mounted Valances

BOX PLEAT

- 14" standard length at center (customizable)
- Standard, Expanded (Shown-48") or customized panel spacing available. Reference order form for options & spacing charts
- 1 ½", 3 ½", 5 ½", 7 ¼" or 11 ¼" returns
- Velcro attachment
- Easily removed for cleaning
- L and ceiling mount brackets included

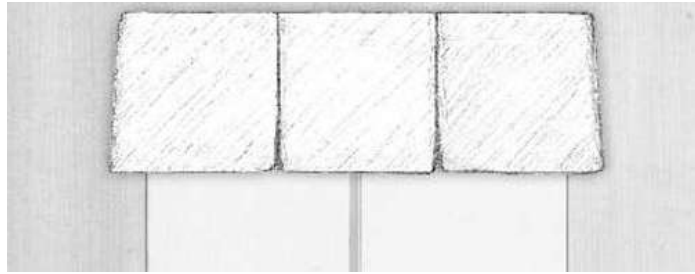

BOX PLEAT
14" Standard length
Velcro Removeable for Laundering

STATIONARY ROMAN


- 14" standard length at center (shown)
- Customizable length - each 5" in length over standard 14" adds an additional fold. Reference order form for folds by length.
- 1 ½", 3 ½", 5 ½", 7 ¼" or 11 ¼" returns
- Affixed to board
- L and ceiling mount brackets included



STATIONARY ROMAN
14" Standard Length
Not launderable - Affixed to board

SHEFFIELD

- 14" standard length at center (shown)
- Customizable length
- 1 ½", 3 ½", 5 ½", 7 ¼" or 11 ¼" returns
- Affixed to board
- L and ceiling mount brackets included

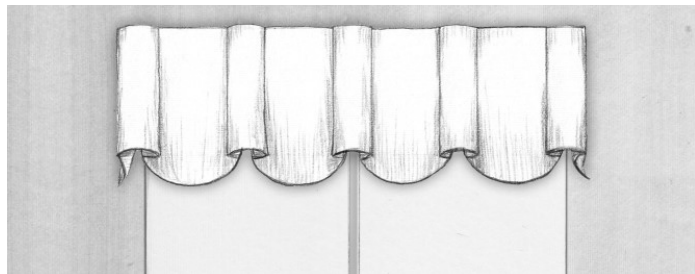

SHEFFIELD
14" Standard Length; 12" Short point
Not launderable - Affixed to board

IPC.605/Rev.5

Board Mounted Valances

Suggested Specifications

PART 1 - GENERAL

- 1.01 SUMMARY
- A. Board Mounted Valance
- 1.02 SECTION INCLUDES
- A. Board Mounted Valance
- 1.03 REFERENCES
- A. National Fire Protection Association (NFPA)
- 1.04 SYSTEM DESCRIPTION
- A. Performance Requirements: Provide Board Mounted Valance fabrics that conform to the following requirements of regulatory agencies and the quality control of Inpro Corporation.
- 1. Fire Performance Characteristics: Provide top treatment fabrics that conform with NFPA 701, Fire Tests or Flame and Resistant Textiles and Films.
- 1.05 SUBMITTALS
- A. Product Data: Manufacturer's printed product data for each type of Board Mounted Valance specified.
- B. Fabric Samples: Swatch cards of fabric samples illustrating fabric color and weave.
- C. Manufacturer's Care Instruction: Printed care instructions for each Board Mounted Valance.
- 1.06 DELIVERY, STORAGE AND HANDLING
- A. Deliver materials in unopened factory packaging to the jobsite.
- B. Inspect materials at delivery to assure that specified products have been received.
- C. Store in original packaging in a climate controlled location away from direct sunlight.
- 1.07 PROJECT CONDITIONS
- A. Environmental Requirements: Products must be installed in an interior climate controlled environment.
- 1.08 WARRANTY
- A. Standard Inpro Limited Warranty against material and manufacturing defects.

PART 2 - PRODUCTS

- 2.01 MANUFACTURER
- A. Acceptable Manufacturer:
Inpro Corporation,
PO Box 406 Muskego, WI 53150 USA;
Telephone: 800.222.5556, Fax: 888.715.8407,
www.inprocorp.com
- B. Substitutions: Not permitted
- C. Provide all top treatment boards from a single source.
- 2.02 MATERIALS
- A. Board Mounted Valance
- 1. Fabric: Provide 100% polyester fabric that is flame retardant.
- 2.03 FINISH AND COLOR
- A. Board Mounted Valance Fabric: Select solid or patterned fabric from manufacturer's standard selection.
- 2.04 FABRICATION
- A. Board Mounted Valance
- 1. Provide Box Pleat Board Mounted Valance to width required for window.
 - a. Board Mounted Valance shall have a 14" drop at the center or other specified length. Standard, Expanded or Customized panel spacing available. Reference order form for options & spacing charts
 - b. Returns shall be 1.5", 3.5", 5.5", 7.25" or 11.25".
 - c. Mounting board shall be installed with L-bracket or ceiling mount bracket. Fasteners to be supplied by others.
 - d. Attachment of valance to the mounting board shall be with Velcro, which allows for easy removal.
- 2. Provide Stationary Roman Board Mounted Valance to width required for window.
 - a. Board Mounted Valance shall have a 14" drop at the center or other specified length. Customizable length – each 5" in length over standard 14" adds an additional fold; reference order form for folds by length.
 - b. Returns shall be 1.5", 3.5", 5.5", 7.25" or 11.25".
 - c. Mounting board shall be installed with L-bracket or ceiling mount bracket. Fasteners to be supplied by others.
 - d. Attachment of valance to the mounting board is permanently affixed.
- 3. Provide Sheffield Board Mounted Valance to width required for window.
 - a. Board Mounted Valance shall have a 14" drop at the center or other specified length.
 - b. Returns shall be 1.5", 3.5", 5.5", 7.25" or 11.25".
 - c. Mounting board shall be installed with L-bracket or ceiling mount bracket. Fasteners to be supplied by others.
 - d. Attachment of valance to the mounting board is permanently affixed.

PART 3 - EXECUTION

- 3.01 EXAMINATION
- A. Examine areas and conditions in which the valance will be installed.
- 1. Complete all finishing operations, including painting, before beginning installation of valance.
- 2. Verify that surfaces and above ceiling supports are ready to receive work.
- 3.02 PREPARATION
- A. General: Prior to installation, clean substrate to remove dust, debris, and loose particles.
- 3.03 INSTALLATION
- A. General: Locate the Board Mounted Valance as indicated on the approved detail drawing for the appropriate substrate and in compliance with the installation instructions.
- 3.04 CLEANING
- A. At completion of the installation, remove any debris and clean surfaces in accordance with the clean-up and maintenance instructions.