


Open Mesh Cloth Eze-Mesh™

Suggested Specifications

- Open weave 100% nylon mesh material
- Inherently flame retardant; passes NPFA 701 small scale
- Available heights: 12" (30.48cm), 20" (50.8cm), 22" (55.8cm), 24" (60.96cm), 28" (71.12cm) and 36" (91.44cm).
Height sizes can vary +1 1/2" -1" (+3.81 cm -2.54cm)
- Optional antimicrobial mesh in available heights: 20" (50.8cm), 22" (55.8cm), 24" (60.96cm), 28" (71.12cm).
Height sizes can vary +1 1/2"-1" (+3.81 cm -2.54cm)
Antimicrobial; up to 25 wash cycles. ASTM E2149-10
- 1/2" (12.7mm) holes, greater than 70% open, to permit air and steam circulation
- Washable to 160°F (remove immediately)
- Tumble dry to 140°F (remove immediately)
- Colors: choose color from manufacturer's standard selection of Snow, Tusk.
Do not dye Eze-Mesh™. This will remove the finish properties and weaken the mesh. Dyed mesh is not covered under our warranty.
- Mesh shall be non-pilling
- Tie-threads may or may not be visible
- Eze-Mesh™ flaw factor is 6%. Flaws include, but are not limited to, tears, splits and/or waves. Wave tolerance is 1/4" typical height variation within the bolt.
- Inpro Corporation warrants to its purchasers that Clickeze® Mesh shall be free of material and manufacturing defect for a period of 90 days from the date of shipment.

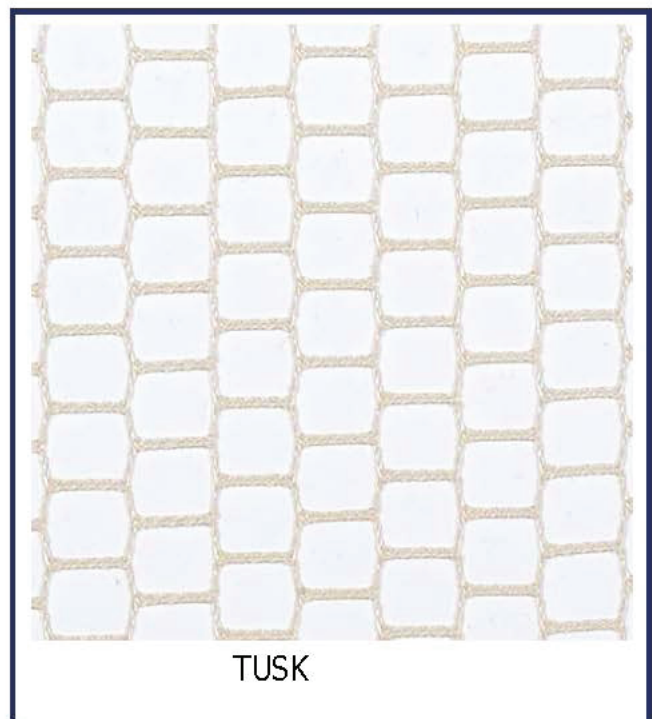

IPC.537/REV.9