

JL Series

Reinforced Vapor Barrier

Floor to Floor

Wall to Wall

Roof to Roof



Movement Rating \pm 100%

Product Guide



- ▶ High performance nylon-reinforced 45 mil thick EPDM membrane capable of multi-directional movement.
- ▶ Exterior grade moisture barrier for horizontal and vertical building applications.
- ▶ 5/8" (16mm) & 1 1/4" (32mm) inside diameter drain options available.
- ▶ Provides additional moisture protection measure behind any expansion joint cover system.
- ▶ Multiple mounting configurations available.
- ▶ Offers excellent resistance to tears, punctures, ozone, chemicals and UV exposure.
- ▶ Installed with approved sealants and mechanically secured in place with aluminum mounting bars.

Application	System	RVB Width	
		US	mm
FLOOR TO FLOOR WALL TO WALL ROOF TO ROOF	JL006-RVB	6"	152
	JL009-RVB	9"	208
	JL012-RVB	12"	305
	JL018-RVB	18"	457
	JL024-RVB	24"	610
	JL030-RVB	30"	762
	JL036-RVB	36"	914


IPC.3214/REV.4

JL Series

Reinforced Vapor Barrier

JL Series

Secured with EJ Cover Frames (Optional Drain)

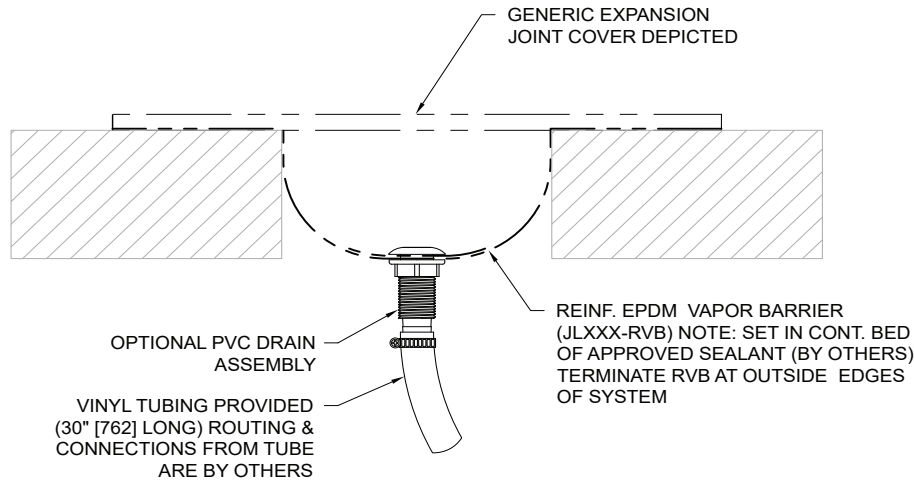

JL Series

Secured with Termination Bar (Optional Drain)

