


# WebbLok™ Mullion

## Installation Instructions


### 1. The “L” Mullion

- Dimensions: 1½” x 1” x 1/8” (*custom sizes available per project requirements*)
- Specs:
  - There are 3 mounting holes on the 1” of the angle.
  - Track will be pre-mounted on the mullion.
  - Pre-drilled mounting holes are located on the bracket at the top of the mullion.
- Options: - Can be manufactured “Leg In” where placement is on the inside of the angle or “Leg Out” where the track is on the outside of the angle.
  - \*Privacy “L” mullion option is 1½” x 1½” x 1/8”.

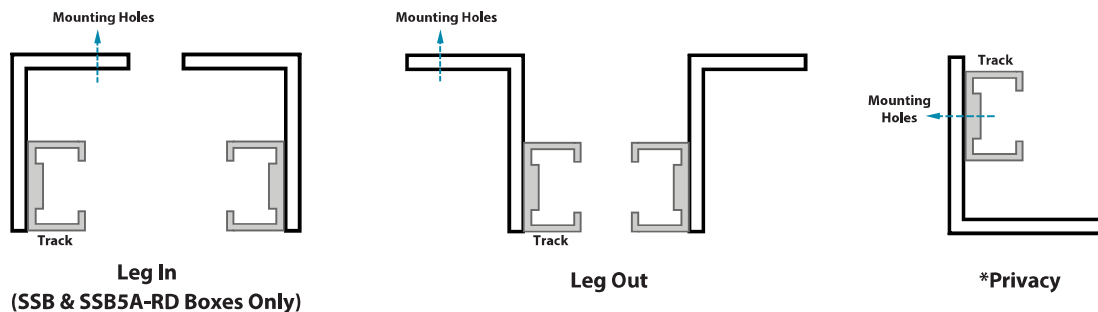


### 2. The “H” Mullion

- Dimensions: 1” x 1½” x 1/8” “U” Channel (*custom sizes available per project req.*)
- Specs:
  - There are 3 mounting holes on the 1” face which allows for direct mounting onto an existing window mullion.
  - Track is placed on either side and pre-mounted on the mullion.
  - Pre-drilled holes are located at the top of the mullion for mounting bracket plates.

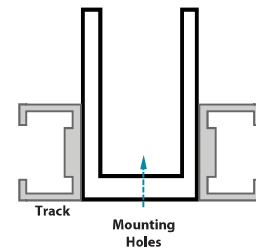

### 3. Flange Mullion

- Dimensions: 1½” x 1/8” Flat Bar (*custom sizes available per project requirements*)
- Specs:
  - There are 3 mounting holes as well as pre-drilled holes for mounting bracket plates.
- Options: Used as filler to close gaps back to the window glass and/or wall pockets.

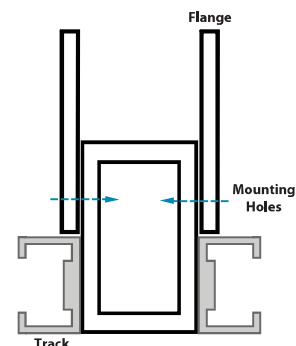

IPC.2124/REV.4

# WebbLok™ Mullion

## Installation Instructions

---

### 4. Floater mullions

- Dimensions: 1" x 1½" x 1/8" tube stock (*custom sizes available per project requirements*)
- Specs:
  - Used when no existing mullion is present and the only mounting surface is the window sill and header.
  - White nylon base (see image below) attaches to the sill.
  - Bracket plates come unattached, allowing installer the freedom to adjust on site.
- Options: Mullion can be attached at the top by mounting bracket plates to ceiling or window header.

